



PRODUCT SPECIFICATIONS




	FIELD SHINGLE	HIP SHINGLE	CLICK-LOCK BATTEN
MATERIAL	HDPE	HDPE	PVC
SIZE	36"x27"x0.030" (91.4cm x 68.6cm x 0.8mm)	27"x27"x0.030" (68.6cm x 68.6cm x 0.8mm)	1.375"x.875"x .136" (3.5cm x 2.2cm x 345.4cm)
WEIGHT	0.95 lbs (0.430KG)	0.55 lbs (0.249 KG)	1.52 lbs (0.689 KG)
COVERAGE	1.88 SQFT (0.174m2)	0 SQFT	NA
FIRE RATING	Class A	Class A	Class A
	Non-fire Rated available	Non-fire Rated available	
COLOR	Weathered palm	Weathered palm	Natural Brown
PACKAGING	Box: 37"x28"x11" (94cm x 71.1cm x 28cm) 70pc. 63lbs (28.5 KG)	Box: 37"x28"x11" (94cm x 71.1cm x 28cm) 100pc. 65lbs (29.48)	Bundle: 3"x4"x136" (7.6cm x 10.2cm x 345.4cm) 10pc.
	Bulk bundle: 37"x28"x4.5" (94cm x 71.1cm x 11.4cm) 25pc. 20lbs (9.07 KG)	Bulk bundle: 28"x28"x4.5" (71.1cm x 71.1cm x 11.5cm) 40pc. 21lbs (9.52 KG)	


*Bulk bundles available for live load containers

Installation can be over open frame or deck:

OPEN FRAME

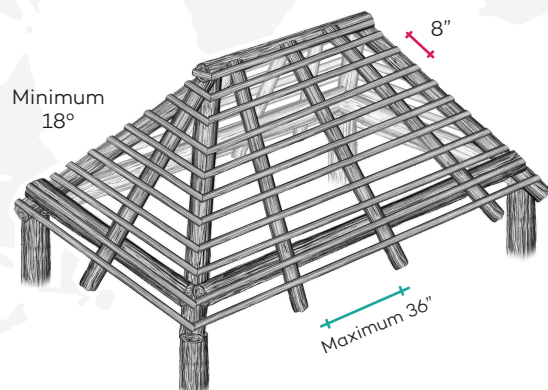

PLYWOOD DECK

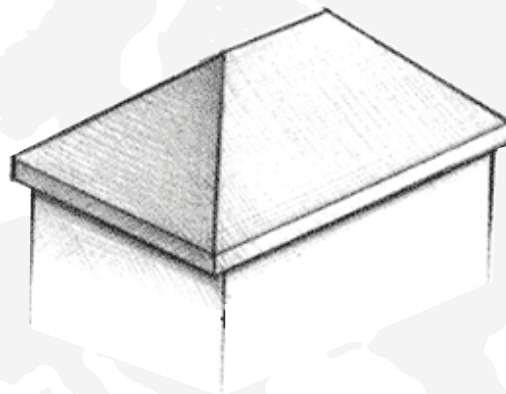

Click-Lock batten weight per SQFT:
0.70 lbs. (0.32 KG).

Weight per SQFT (excluding underlayment)
0.50 lbs. (0.226 KG).



Recommended installation with stainless steel 1.25" ring shank roofing nail, 1" washer head screw, 1" crown staple, at minimum of 1.25". In accordance with local building code.



Recommend fastener stainless steel 1.25" (31.75mm) ring shank roofing nail.



For attachment of Click-Lock batten to rafter use 2.5" stainless steel #10 screw, nail, screw at minimum of 2.5".

Roof pitch 4/12 (18 degrees) or greater.



Max rafter centers for Click-Lock system:
36" (914mm).



Courses installed at 8" (203mm) on center.